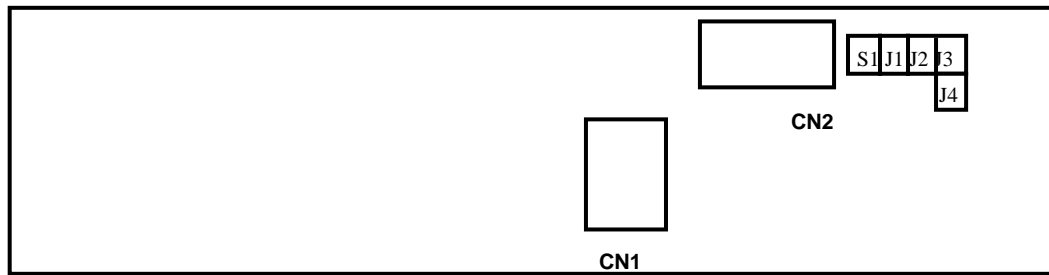


**SD300/SD400/SD600 JUMPER SETTING**

Function	S1	J1	J2	J3	J4
	ISO/JIS2	ALT-Num	NumLock	Class	DOS/Windows
Opened	ISO	Enable	Enable	Vendor	DOS
Closed	JIS2	Disable	Disable	HID	Windows

**Note:**

1. Track Enable/Disable needs to be configured via MSR Manager program.
2. Leading/Ending code needs to be configured via MSR Manager program as well.